


Genie GS™-1530/GS-1930 Specifications

Self-Propelled Scissor Lift

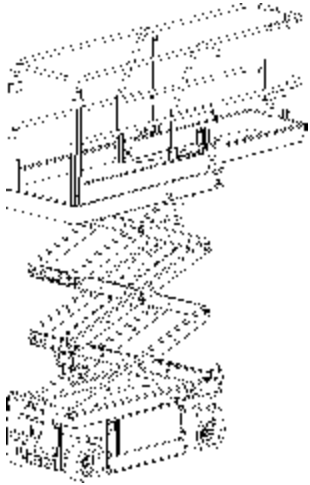

SPECIFICATIONS

| MODEL | GS-1530 | | GS-1930 | |
|-----------------------------------|---|----------|------------------|----------|
| | US | Metric | US | Metric |
| Working height | 21 ft | 6.5 m | 25 ft 1 in | 7.8 m |
| Platform height | 15 ft | 4.6 m | 19 ft 1 in | 5.8 m |
| Height - stowed (guardrails) | | | | |
| ANSI, CSA | 76 in | 1.93 m | 78 in | 2 m |
| CE | 80 in | 2.04 m | 82 1/2 in | 2.1 m |
| Height - stowed (platform) | 36 1/2 in | 93 cm | 38 1/2 in | 98 cm |
| Length - stowed | 72 in | 1.83 m | 72 in | 1.83 m |
| Width | 30 in | 76 cm | 30 in | 76 cm |
| Wheelbase | 52 in | 1.32 m | 52 in | 1.32 m |
| Ground clearance | 2 5/8 in | 7 cm | 2 5/8 in | 7 cm |
| Pothole guards deployed | 7/8 in | 2 cm | 7/8 in | 2 cm |
| Platform length - outside | 64 3/8 in | 1.64 m | 64 3/8 in | 1.64 m |
| Platform width - outside | 29 1/4 in | 74 cm | 29 1/4 in | 74 cm |
| Platform length - extended | 103 3/8 in | 2.63 m | 103 3/8 in | 2.63 m |
| Guardrail height - ANSI, CSA | 39 in | 1 m | 39 in | 1 m |
| - CE | 43 3/8 in | 1.1 m | 43 3/8 in | 1.1 m |
| Toeboard height | 6 in | 15 cm | 6 in | 15 cm |
| Lift capacity | 600 lb | 272 kg | 500 lb | 227 kg |
| Extension deck lift capacity | 250 lb | 113 kg | 250 lb | 113 kg |
| Turning radius - outside | 61 in | 1.55 m | 61 in | 1.55 m |
| Turning radius - inside | zero | | zero | |
| Power source | 24V (4 6V 245AH batteries) (both models) | | | |
| Drive speed - stowed | 0-2.5 mph | 0-4 km/h | 0-2.5 mph | 0-4 km/h |
| Drive speed - raised | 0-0.6 mph | 0-1 km/h | 0-0.6 mph | 0-1 km/h |
| Raise/lower speed | 16/17 sec | | 16/23 sec | |
| Controls | proportional | | proportional | |
| Tires (solid rubber, non-marking) | 12 x 4.5 x 8 in (30 x 11 x 20 cm) both models | | | |
| Gradeability | 30% | | 30% | |
| Drive | dual front wheel | | dual front wheel | |
| Multiple disc brakes | dual rear wheel | | dual rear wheel | |
| Pothole protection | standard | | standard | |
| Weight - ANSI | 2,658 lb | 1,206 kg | 2,956 lb | 1,341 kg |
| - CSA, CE | 2,658 lb | 1,206 kg | 2,880 lb | 1,306 kg |

STANDARD FEATURES

- Solid steel deck platform with slip-resistant surface
- Low noise level
- Proportional controls
- High angle steering for excellent maneuverability
- Multiple disc brakes provide smooth deceleration
- Pothole guards reduce tip-over hazards
- Maintenance-free pivot-point bearings
- Removable joystick control box allows activation of all lift and drive functions from the ground

Genie Industries

USA 18340 NE 76th Street
P.O. Box 97030
Redmond, Washington 98073-9730
Telephone (425) 881-1800
Toll Free USA/Canada 800-536-1800
Fax (425) 883-3475
<http://www.genielift.com>

UK The Maltings, Wharf Road
Grantham
Lincolnshire NG31 6BH
Telephone (44) 01476-584333
Fax (44) 01476-584334
<http://www.genielift.com>

Continuous improvement of our products is a Genie policy. Product specifications are subject to change without notice or obligation. The drawings in this brochure are for illustrative purposes only. Refer to the appropriate Genie GS-1530 and Genie GS-1930 Operator's Manual for instructions on the proper use of this equipment. Failure to follow the appropriate Operator's Manual when using a Genie GS-1530 or GS-1930, or to otherwise act irresponsibly, may result in serious injury or death. Copyright © 1997 by Genie Industries. "Genie" is a Registered Trademark of Genie Industries in the USA and many other countries. "GS" is a Trademark of Genie Industries. Patents pending. 5/13/02